RSA

Round Straight Aluminum Pole
No Arm — Direct Buried

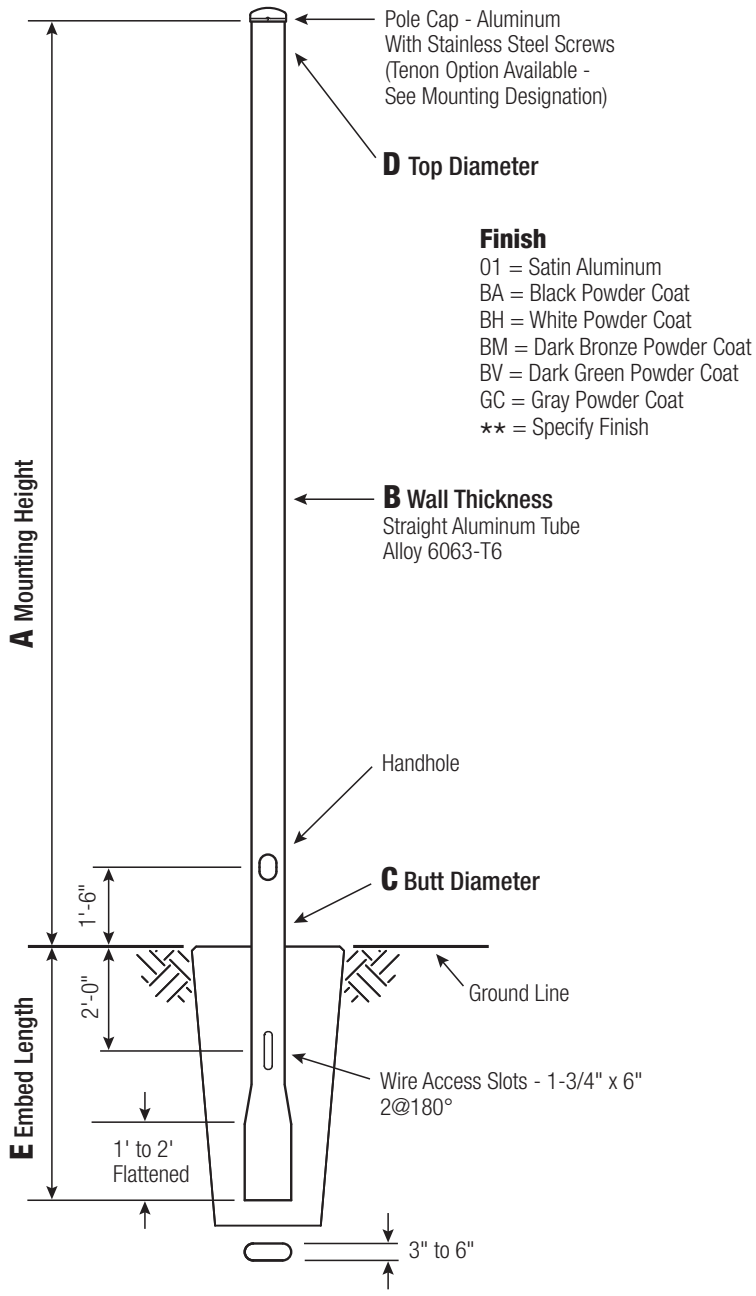

WARNING:
Do not install light pole without luminaire.

Satin Aluminum or Powder Coated Finish per Customer Specification.

A Mtg. Hgt.	B Wall Thickness	C Butt Diameter	Total Lum. Weight	Maximum EPA 90	100	110	120	130	Catalog Number
20	0.125"	5	40	3.8	2.3	2.1	1.5	1.1	RSA20B5-E-**

C Butt Dia.	D Top Dia.	E Embed
5	5	3'

C and D Dimensions in Inches

Customer Name:		
Project:	Location:	
Notes:		Quantity:

RSA20B5-E - [ ]
CATALOG NUMBER — FINISH

Pole
The pole shaft will be constructed of seamless extruded tube of 6063 Aluminum Alloy per the requirements of ASTM B221. The shaft assembly shall be full-length heat treated to produce a T6 temper.

Handhole
2-1/2" x 5" Handhole with curved Lap Style Aluminum Door and two (2) SS Self-Tapping Attaching Screws. A Grounding Provision is provided as part of the handhole.

Embed Detail
Direct Buried Pole bottom section on 6"+ butt diameter poles will be partially flattened into an anti-rotational, oval cross section. Wire access will be provided 24" below ground line. Soil conditions vary by site. Foundation requirements should be determined by a qualified Structural Engineer with knowledge of jobsite soil conditions.

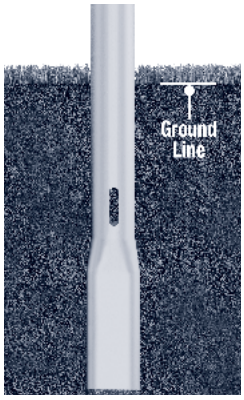

Vibration Damper
When determined necessary by Hapco, a Vibration Damper will be factory-installed inside the pole shaft. Customer specification of the damper is available.

Mounting Designation
Side Drill Mount - *For Side Drill Mount applications specify luminaire type, quantity and orientation. A luminaire drilling template must be supplied at time of order.*



Tenon Mount
For Tenon Mount applications specify both Tenon diameter (2.375", 2.875", 3.5", etc.) and length (3", 4", etc.).

EPA Notes: *Effective Projected Area (EPA) in square feet. EPA's calculated using wind velocity (mph) indicated in accordance with 2009 AASHTO LTS-5 using a 25 year design life. Maximum EPA is based on the luminaire weight shown. Increased luminaire weight may reduce the maximum EPA. If weight is exceeded, or if other design life or code is required, please consult the factory.*

hapco pole products
26252 Hillman Highway
Abingdon, VA 24210
800.368.7171
www.hapco.com