


# RTA

## Round Tapered Aluminum Pole with Arms Triple Bullhorn 180° — Breakaway T-Base

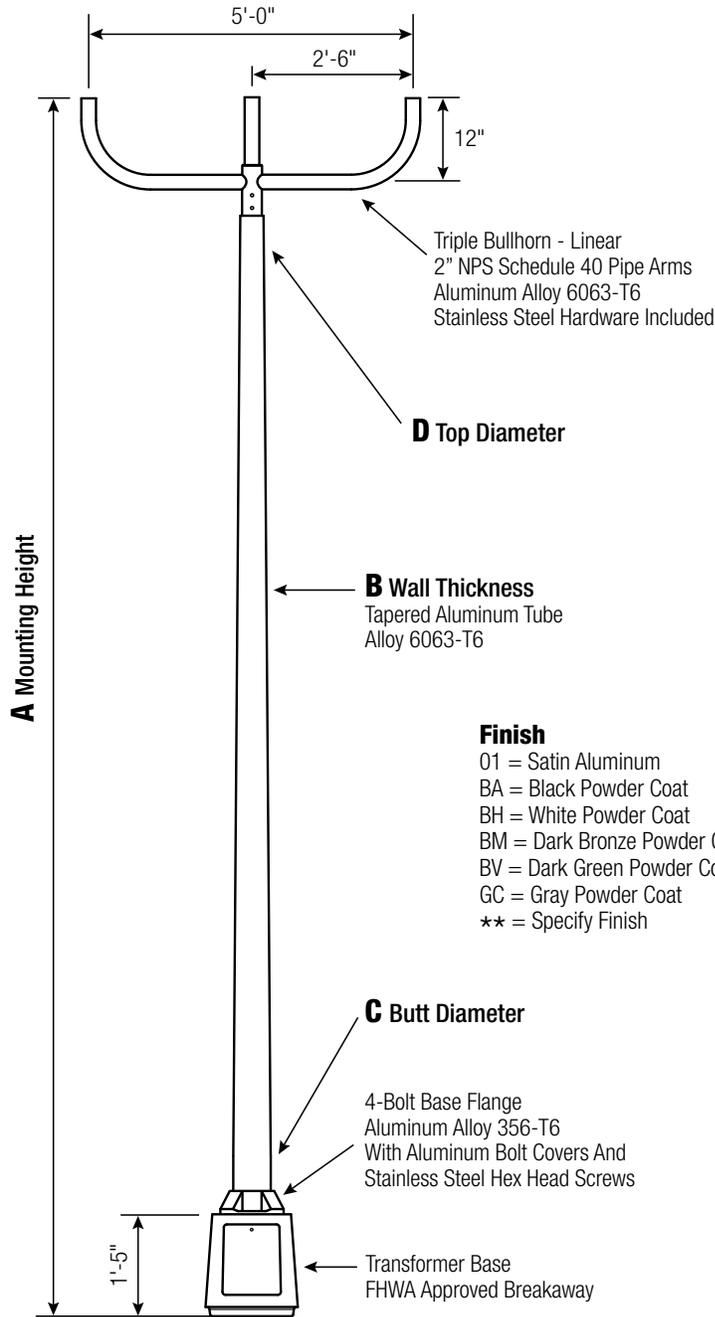

- Finish**  
 01 = Satin Aluminum  
 BA = Black Powder Coat  
 BH = White Powder Coat  
 BM = Dark Bronze Powder Coat  
 BV = Dark Green Powder Coat  
 GC = Gray Powder Coat  
 \*\* = Specify Finish

**RTA35D1CFB30** -

CATALOG NUMBER FINISH


**Pole**  
 The pole shaft will be constructed of seamless extruded tube of 6063 Aluminum Alloy per the requirements of ASTM B221. The shaft assembly shall be full-length heat treated after base weld to produce a T6 temper.

**Base Style**  
 Cast Aluminum Transformer Base (T-Base) of Alloy 356-T6 with Aluminum Door and Stainless Steel Hex Head Screw. FHWA Approved Breakaway.



**Handhole**  
 Tapered Door Opening (9-3/4" W Base x 9-1/4" W Top x 11-3/4" H) with Flush Mount Aluminum Cover and Stainless Steel Hex Head Screw. Grounding Provisions tapped 1/4"-20NC and 1/2"-13NC are provided.

**Anchorage**  
**Base Anchorage** includes four (4) L-shaped Steel Anchor Bolts conforming to AASHTO M314-90 Grade 55, four (4) each Heavy-Duty Flat Washers, Lock Washers, and Hex Nuts (all components Galv. Steel). Ten inches (10") of threaded end will be galvanized per ASTM A153. **Top Connecting Hardware** includes four (4) each 1"-8NC x 3-3/4" Hex Head Bolts, Flat Washers, Heavy-Duty Flat Washers, Lock Washers, and Hex Nuts (all components Galv. Steel). A bolt circle template will be provided.

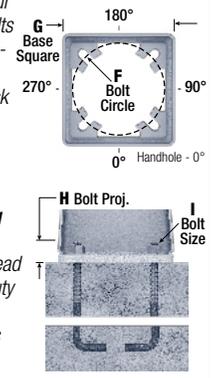

**Vibration Damper**  
 When determined necessary by Hapco, a Vibration Damper will be factory-installed inside the pole shaft. Customer specification of the damper is available.



**EPA Notes:** Effective Projected Area (EPA) in square feet. EPA's calculated using wind velocity (mph) indicated in accordance with 2009 AASHTO LTS-5 using a 25 year design life. Maximum EPA is based on the luminaire weight shown. Increased luminaire weight may reduce the maximum EPA. If weight is exceeded, or if other design life or code is required, please consult the factory.

**hapco** pole products  
 26252 Hillman Highway  
 Abingdon, VA 24210  
 800.368.7171  
 www.hapco.com

**WARNING:** Do not install light pole without luminaire. Satin Aluminum or Powder Coated Finish per Customer Specification.

| A Mtg. Hgt. | B Wall Thickness | C Butt Diameter | Lum. Weight | MAXIMUM EPA |     |     |     |     | CATALOG NUMBER  |
|-------------|------------------|-----------------|-------------|-------------|-----|-----|-----|-----|-----------------|
|             |                  |                 |             | 90          | 100 | 110 | 120 | 130 |                 |
| 35          | 0.188"           | 10              | 40          | 6.0         | 4.4 | 4.0 | 3.0 | 2.2 | RTA35D1CFB30-** |

| C Butt Dia. | D Top Dia. | F Bolt Cir. Dia. | G Base Sq. | H Bolt Proj. | I Bolt Size |
|-------------|------------|------------------|------------|--------------|-------------|
| 10          | 6          | 15               | 15.375     | 3.5          | 1 x 48 x 4  |

Dimensions in Inches

|                       |                  |
|-----------------------|------------------|
| <b>CUSTOMER NAME:</b> |                  |
| <b>PROJECT:</b>       | <b>LOCATION:</b> |
| <b>NOTES:</b>         | <b>QUANTITY:</b> |