

RTA

Round Tapered Aluminum Pole with Arms Single Truss — Breakaway T-Base

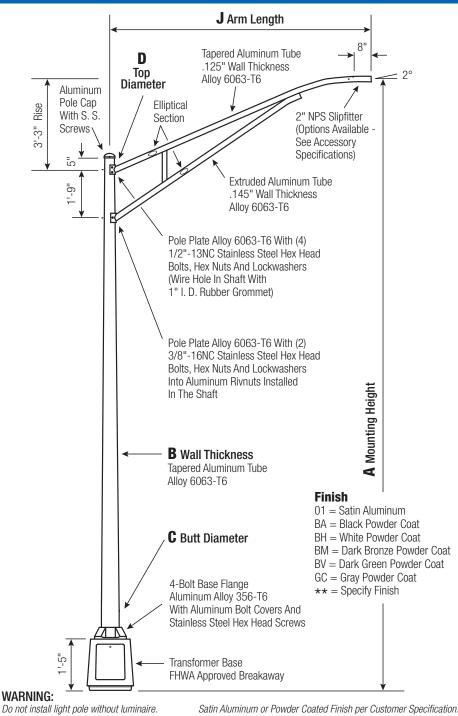

| А Мтб. Нбт. | B Wall Thickness | C Butt Diameter | J Arm Length | Lum. Weight | 90 | Ma 100 | хімим Е 110 | PA 120 | 130 | Old Cat. Number | Catalog Number |
|-------------------|-------------------------------|-----------------------|--------------------|----------------|---------------------|-----------|----------------|---------------|-----|--------------------|-----------------|
| 30 | 0.156" | 8 | 12' | 40 | 3.6 | 2.6 | 2.3 | 1.7 | 1.2 | 33-619 | RTA30C8CFT1C-** |
| C Butt Dia. | | Т | D Top Dia. | | F Bolt Cir. Dia. | | | G Base Sq. | | H Bolt Proj. | BOLT SIZE |
| 8 | | | 6 | | 15 | | | 15.375 | | 3.5 | 1 x 36 x 4 |

| Location: | |
|-----------|-----------|
| · · · · · | QUANTITY |
| | Location: |

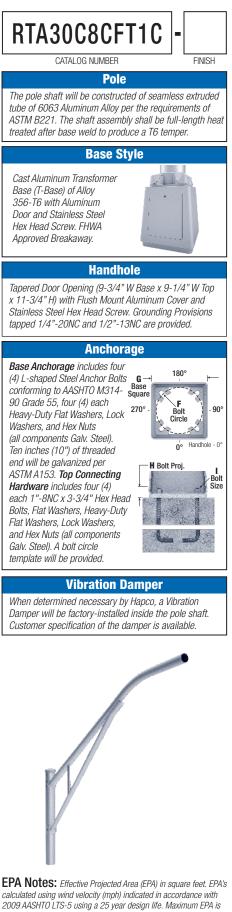

calculated using wind velocity (mph) indicated in accordance with 2009 AASHTO LTS-5 using a 25 year design life. Maximum EPA is based on the luminaire weight shown. Increased luminaire weight may reduce the maximum EPA. If weight is exceeded, or if other design life or code is required, please consult the factory.



Dimensions in Inches

26252 Hillman Highway Abingdon, VA 24210 800.368.7171 www.hapco.com