

Powder Coated Finish per Customer Specification.

C BUTT DIA.	D TOP DIA.	F BOLT CIR. DIA.	G BASE DIA.	H BOLT PROJ.	I BOLT SIZE
4	4	9 - 11	14.5	2	.75 x 17 x 3
5	5	9 - 11	14.5	2	.75 x 17 x 3
6	6	9 - 11	14.5	2	.75 x 17 x 3

Square Bolt Pattern

Dimensions in Inches

Base


Cast Aluminum, 1-Piece Structural Pedestal Base of Alloy 356 per ASTM B26 or B108. The base shall have an access door with cast aluminum cover and stainless steel attaching hardware. An internal grounding provision will be provided opposite the access door.

Pole

The pole shaft will be constructed of seamless extruded tube of 6063 Aluminum Alloy per the requirements of ASTM B221. The shaft shall be joined to the structural base by means of a complete circumferential weld in accordance with AWS Specification D1.2. The assembly shall be full-length heat-treated after weld to produce a T6 temper.

Anchorage

Anchorage Kit will include four (4) L-shaped Steel Anchor Bolts conforming to AASHTO M314-90 Grade 55. Ten inches (10") of threaded end will be galvanized per ASTM A153. Kits will contain four (4) Hex Nuts, four (4) Lock Washers, and four (4) Flat Washers (all components Galvanized Steel). A bolt circle template will be provided.

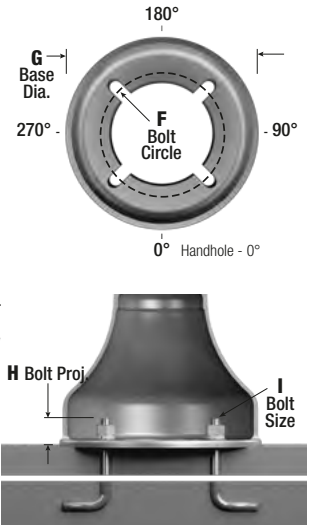

NOTE: All BRISTOL pole options may be specified in designs utilizing Direct Buried anchorage.

Vibration Damper

When determined necessary by Hapco, a Vibration Damper will be factory installed inside the pole shaft. Customer specification of the damper is available.



A MTG. HGT.	B WALL THICKNESS	C BUTT DIA.	TOTAL LUM. WEIGHT	MAXIMUM EPA						CATALOG NUMBER*
				90	100	110	120	130	140	
8	0.125	4	100	16.0	12.7	10.2	8.4	7.0	5.9	BRS08B4-4-SF12-**
	0.188	4	100	23.0	18.4	15.0	12.3	10.3	8.7	BRS08D4-4-SF12-**
	0.125	5	100	24.9	19.9	16.1	13.3	11.1	9.4	BRS08B5-4-SF12-**
	0.188	5	100	42.7	34.3	28.0	23.3	19.7	16.9	BRS08D5-4-SF12-**
	0.125	6	100	36.7	29.5	24.0	20.0	16.8	14.3	BRS08B6-4-SF12-**
	0.188	6	100	45.0	36.2	29.5	24.6	20.8	17.8	BRS08D6-4-SF12-**
10	0.125	4	100	11.9	9.3	7.4	5.9	4.8	4.0	BRS10B4-4-SF12-**
	0.188	4	100	17.5	13.8	11.1	9.1	7.5	6.2	BRS10D4-4-SF12-**
	0.125	5	100	19.2	15.2	12.1	9.9	8.2	6.9	BRS10B5-4-SF12-**
	0.188	5	100	33.6	26.9	21.8	18.1	15.2	12.9	BRS10D5-4-SF12-**
	0.125	6	100	28.8	23.0	18.5	15.3	12.7	10.8	BRS10B6-4-SF12-**
	0.188	6	100	35.1	28.1	22.7	18.8	15.8	13.4	BRS10D6-4-SF12-**
12	0.125	4	100	9.0	6.9	5.3	4.2	3.3	2.5	BRS12B4-4-SF12-**
	0.188	4	100	13.7	10.7	8.5	6.8	5.5	4.4	BRS12D4-4-SF12-**
	0.125	5	100	14.8	11.6	9.0	7.2	5.9	4.9	BRS12B5-4-SF12-**
	0.188	5	100	26.9	21.4	17.2	14.1	11.7	9.9	BRS12D5-4-SF12-**
	0.125	6	100	23.1	18.4	14.5	11.9	9.8	8.2	BRS12B6-4-SF12-**
	0.188	6	100	28.3	22.6	18.0	14.8	12.3	10.4	BRS12D6-4-SF12-**
14	0.125	4	75	7.0	5.2	3.9	2.9	2.1	1.5	BRS14B4-4-SF12-**
	0.188	4	100	10.8	8.3	6.4	5.0	3.9	3.0	BRS14D4-4-SF12-**
	0.125	5	100	11.7	9.0	6.8	5.3	4.2	3.3	BRS14B5-4-SF12-**
	0.188	5	100	22.0	17.4	13.8	11.1	9.2	7.6	BRS14D5-4-SF12-**
	0.125	6	100	18.5	14.6	11.2	9.1	7.4	6.1	BRS14B6-4-SF12-**
	0.188	6	100	23.3	18.4	14.4	11.8	9.7	8.0	BRS14D6-4-SF12-**
16	0.125	4	60	5.3	3.7	2.6	1.7	1.1	0.6	BRS16B4-4-SF12-**
	0.188	4	80	8.5	6.3	4.8	3.5	2.6	1.9	BRS16D4-4-SF12-**
	0.125	5	85	9.1	6.8	4.9	3.6	2.7	2.1	BRS16B5-4-SF12-**
	0.188	5	100	17.9	14.0	10.9	8.6	7.0	5.7	BRS16D5-4-SF12-**
	0.125	6	100	14.9	11.6	8.6	6.8	5.4	4.4	BRS16B6-4-SF12-**
	0.188	6	100	19.2	15.0	11.5	9.2	7.5	6.1	BRS16D6-4-SF12-**
18	0.125	4	75	3.5	2.2	1.4	0.7	-	-	BRS18B4-4-SF12-**
	0.188	4	60	6.6	4.8	3.4	2.3	1.5	1.0	BRS18D4-4-SF12-**
	0.125	5	60	7.0	5.1	3.4	2.3	1.6	1.1	BRS18B5-4-SF12-**
	0.188	5	100	14.4	11.1	8.4	6.5	5.1	4.1	BRS18D5-4-SF12-**
	0.125	6	100	11.8	9.0	6.4	4.9	3.8	2.9	BRS18B6-4-SF12-**
	0.188	6	100	15.7	12.2	9.0	7.1	5.6	4.4	BRS18D6-4-SF12-**
20	0.125	4	90	2.0	1.0	-	-	-	-	BRS20B4-4-SF12-**
	0.188	4	65	4.8	3.2	2.1	1.3	0.6	-	BRS20D4-4-SF12-**
	0.125	5	50	5.2	3.6	2.1	1.2	0.6	-	BRS20B5-4-SF12-**
	0.188	5	100	11.5	8.7	6.3	4.7	3.5	2.7	BRS20D5-4-SF12-**
	0.125	6	75	9.4	7.0	4.6	3.4	2.4	1.7	BRS20B6-4-SF12-**
	0.188	6	100	12.8	9.8	7.0	5.3	4.0	3.0	BRS20D6-4-SF12-**
25	0.188	4	60	1.5	-	-	-	-	-	BRS25D4-4-SF12-**
	0.125	5	75	1.3	-	-	-	-	-	BRS25B5-4-SF12-**
	0.188	5	55	6.5	4.5	2.6	1.4	0.7	-	BRS25D5-4-SF12-**
	0.125	6	60	4.6	2.9	1.1	-	-	-	BRS25B6-4-SF12-**
	0.188	6	40	7.5	5.3	3.0	1.8	1.0	-	BRS25D6-4-SF12-**
30	0.188	5	75	2.2	0.9	-	-	-	-	BRS30D5-4-SF12-**
	0.125	6	70	0.8	-	-	-	-	-	BRS30B6-4-SF12-**
	0.188	6	40	3.6	2.0	-	-	-	-	BRS30D6-4-SF12-**

Catalog Number System

The catalog number for Hapco poles utilizes the following identification system.



Catalog Number Example -

BRS 18 B 4 - 4 - SF12 - BA

BRISTOL Structural Base, 18' Mounting Height, .125" Wall Thickness, 4" Butt Diameter, 4-Bolt Base, Straight Fluted Shaft - 12-Flute, Black Powder Coat Finish

Wall Thickness	Butt Dia.	Anchorage
B = .125"	4 = 4"	4 = 4-Bolt Base
D = .188"	5 = 5"	E = Direct Buried
	6 = 6"	

Shaft Style
SF12 = Straight Fluted - 12-Flute

Powder Coat Finish
 BA - Black Powder Coat BV - Dark Green Powder Coat
 BH - White Powder Coat GC - Gray Powder Coat
 BM - Dark Bronze Powder Coat SC - Special Colors*
* Provide RAL # or Sample Color Chip

Mounting Options

Tenon Mount
For Tenon Mount applications specify both Tenon diameter and length.



Flute Options



EPA Notes: Effective Projected Area (EPA) in square feet. EPA's calculated using wind velocity (mph) indicated in accordance with 2015 AASHTO LRFD (7th Edition) using a 50-year design life. Maximum EPA is based on the luminaire weight shown. Increased luminaire weight may reduce maximum EPA. If weight is exceeded, or if other design life or code is required, please consult the factory.

*4-Bolt Base Anchorage shown. For direct buried design replace -4 in catalog number with -E.

CATALOG NUMBER:	QUANTITY:
CUSTOMER NAME:	
PROJECT:	LOCATION:
NOTES:	