
RTA

Round Tapered Aluminum Pole with Arms Quad Cross Arm 90° — 4-Bolt Base

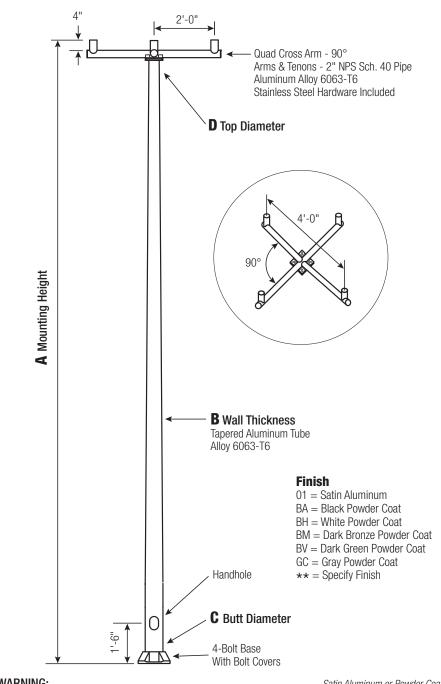

WARNING:


Do not install light pole without luminaire.

Satin Aluminum or Powder Coated Finish per Customer Specification.

Dimensions in Inches

| A Mtg. Hgt. | B Wall Thickness | C Butt Diameter | Total Lum. Weight | 90 | 1 100 | Иахімим ЕР 110 | A 120 | 130 | | Catalog Number |
|-------------------|-------------------------------|-----------------------|----------------------|---------------------|----------|-------------------|----------|-----------------|-----------------|----------------|
| 35 | 0.250" | 8 | 35 | 2.8 | 1.8 | 1.4 | - | - | RTA35F8B4FD0-** | |
| C Butt Dia. | | D Top Dia. | | F Bolt Cir. Dia. | | G Base Sq. | | H Bolt Proj. | | I Bolt Size |
| 8 | | 4.5 | | 11 - 12 | | 11 25 | | 2 75 | | 1 x 36 x 4 |

| Customer Name: | | | | | | |
|----------------|-----------|--|--|--|--|--|
| Project: | Location: | | | | | |
| Notes: | Quantit | | | | | |

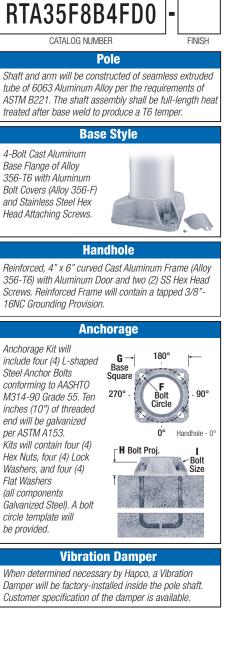



EPA Notes: Effective Projected Area (EPA) in square feet. EPA's calculated using wind velocity (mph) indicated in accordance with 2009 AASHTO LTS-5 using a 25 year design life. Maximum EPA is based on the luminaire weight shown. Increased luminaire weight may reduce the maximum EPA. If weight is exceeded, or if other design life or code is required, please consult the factory.



26252 Hillman Highway Abingdon, VA 24210 800.368.7171 www.hapco.com